

TECHNAL®

By Hydro

Dualframe Si Thermally Broken Aluminium Tilt & Turn Window

CLIVNARS
Windows & Doors

CLIVNARS
Windows & Doors

With an increased focus on the energy efficiency of buildings, it is invaluable to use windows and doors that help towards the overall reduction of energy consumption. The Si suite enables superior overall window performance to be achieved without the need to resort to complex and costly sealed unit specifications.

The Si window suite can achieve an "A+" Window Energy Rating and where specified 'U' Values down to 0.9 W/m2K.

As well as achieving exceptional thermal performance, the Si suite attains superior weather performance for water tightness, air permeability and wind resistance.


TECHNAL®


By Hydro


- Vent Size Max. 1440mm (W) x 2440mm (H)
- Vent Size Min. 470mm (W) x 561mm (H)
- Fixed lights 5m2
- Glazing Thickness to 47mm
- Vent weight to 150kg
- PAS024 and Secured by Design compliant
- A++ Rated WER
- U Value of 1.3 W/m2K with standard DGU*


	AIR PERMEABILITY	WATER TIGHTNESS	WIND RESISTANCE
OPENING LIGHTS	Class 4 600 Pa	Class 9a 600 Pa	Class E 2400 Pa
FIXED LIGHTS	Class 4 600 Pa	Class 9a 600 Pa	Class E 2400 Pa


CLIVNARS
Windows & Doors

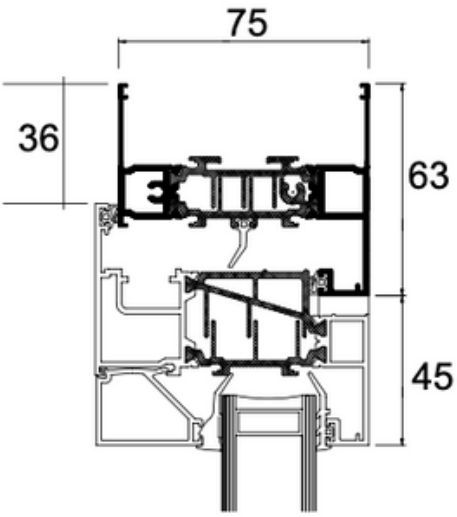


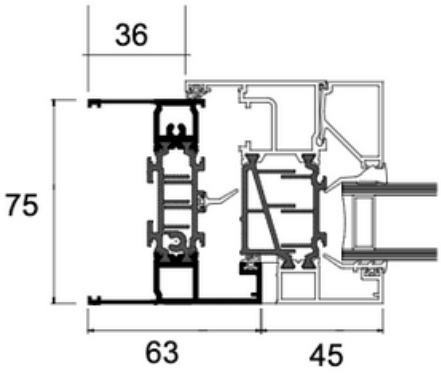

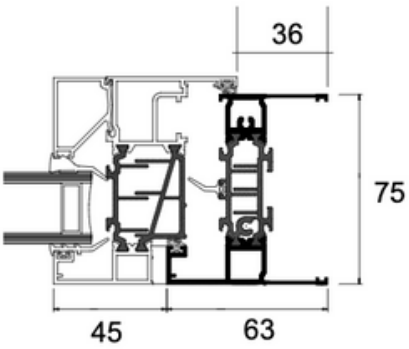

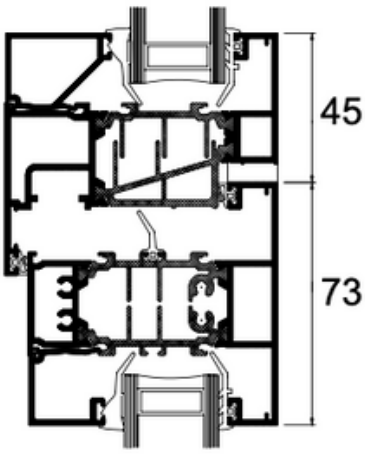

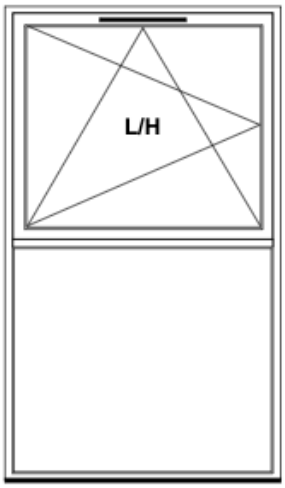

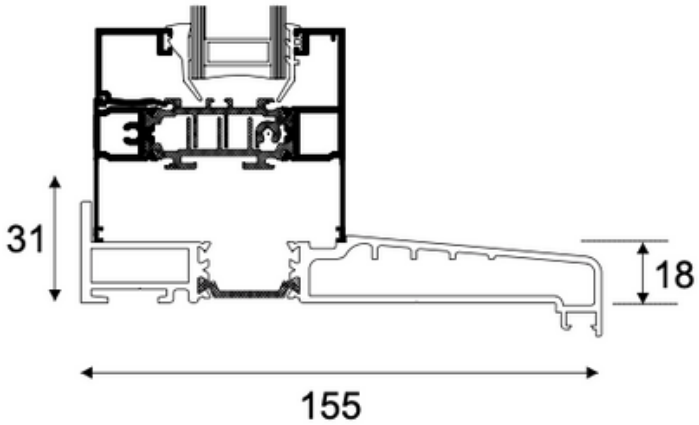

Standard Sectional Details

CLIVNARS
Windows & Doors

Clivnars Ltd
Pindar Road
Hoddesdon
Hertfordshire
EN11 0EA
www.clivnars.co.uk
estimating@clivnars.co.uk